

G+W SURFACE BOX TYPE 4059

Synthetic surface box
Fixed height | Synthetic lid
Design according to DIN 4059

For service connection valves
Standard lid inscription: GAS
Tarmac installation | Heat resistant up to 240 °C

- **FIXED HEIGHT**
 - CLASSIC
 - PAVEMENT
 - SPECIAL
- **HEIGHT ADJUSTABLE**
 - CLASSIC
 - SWISS MODEL
 - FUGENRING
- **ACCESSORIES**



DIN 3580 and DVGW VP310-2 tested

Features and benefits

- Corrosion and maintenance free
- Used materials are recyclable
- Lid and surface box do not freeze together
- Various lid inscriptions on request
- Weight reduction compared to traditional materials

Optional


- Synthetic lid; available in various colours
- Lockable lid
- Bolt with spring

G+W Armaturen GmbH Phone: +49(0)7263 409220
Industriestraße 4 Fax: +49(0)7263 4092210
74933 Neidenstein E-Mail: info@gw-strassenkappen.de
Web: www.gw-strassenkappen.de

Bank:
Sparkasse Heidelberg
BLZ: 672 500 20
Kto-Nr.: 18 024 691

Ust-Id: DE 222587347 – HRB 341744
St.-Nr.: 44077/15546 FA Sinsheim





G+W SURFACE BOX TYPE 4059


Component list

- | | |
|--------------------------|-------------------|
| 1. Lid | EN-GJL-200 (GG20) |
| 2. Housing | P123 |
| 3. Hexagon head bolt M10 | A2-70 |

Reference nos. and nominal dimensions

G+W ref. nos.	Da mm	Dd mm	DI mm	Di mm	Df mm	H mm
80-33-0900XXX	145	119	70	124	200	248
	Weight box in kg	Weight lid in kg	Total weight in kg			
	1.4	1.9	3.2			

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product programme.

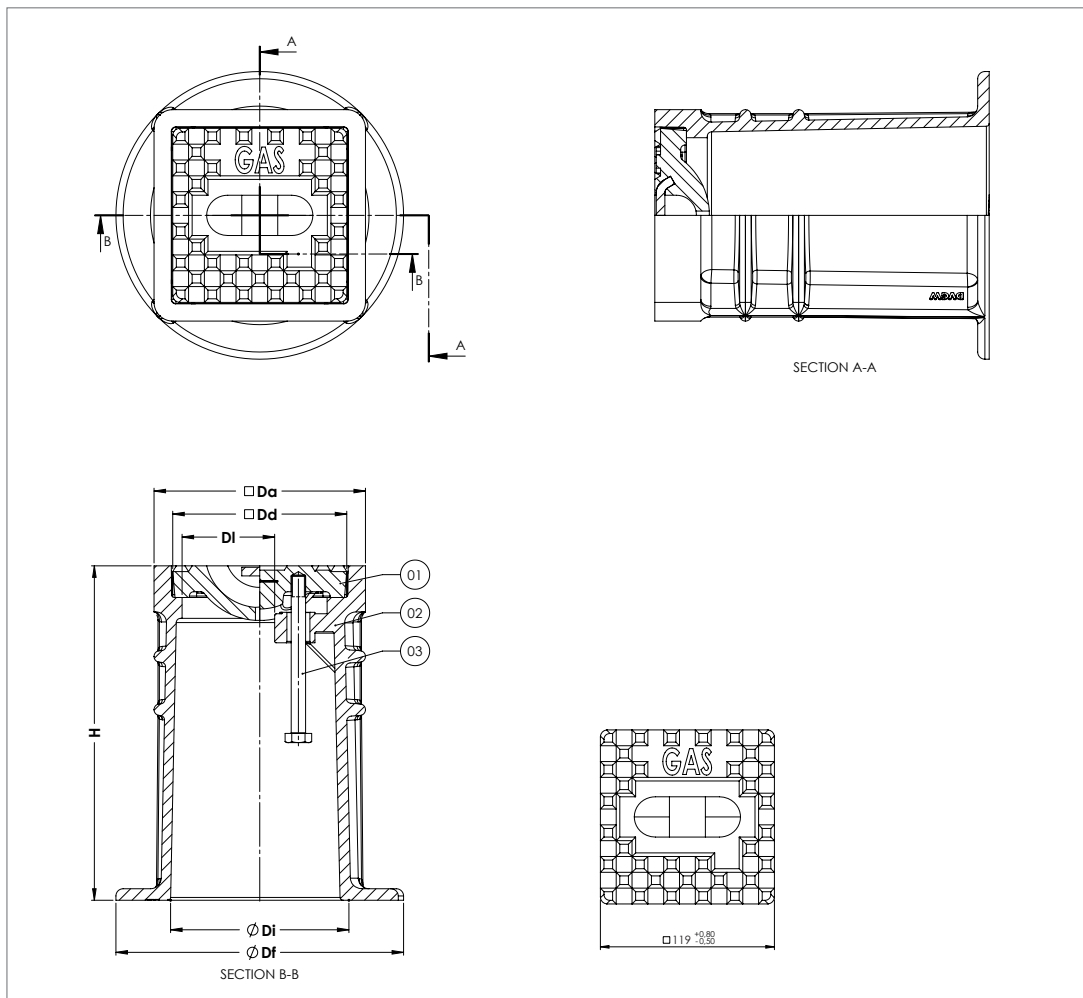

G+W Armaturen GmbH Phone: +49(0)7263 409220
 Industriestraße 4 Fax: +49(0)7263 4092210
 74933 Neidenstein E-Mail: info@gw-strassenkappen.de
 Web: www.gw-strassenkappen.de

Bank:
 Sparkasse Heidelberg BLZ: 672 500 20
 Kto-Nr.: 18 024 691

Ust-Id: DE 222587347 – HRB 341744
 St.-Nr.: 44077/15546 FA Sinsheim